


Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Grey/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: S6A0069 or equivalence
- 6). Backlight: LED, White

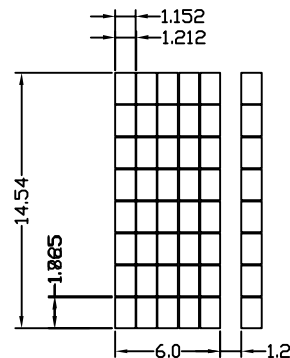

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

HOT DISPLAY			
Dwg Title		HTM1601B	
Dwg No.		Date	
		2009-04-22	
Scale	Unit	Tol.	
	mm	±0.2	
Drawn	Checked	Approved	
DDU			