




Terminal	
No.	Pin Name
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	BLA
16	BLK

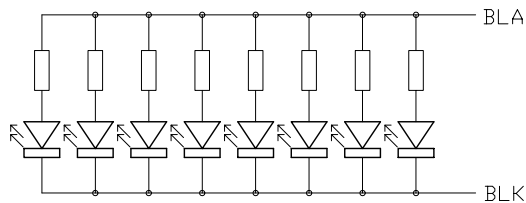

Backlight Circuit  
(No. of LEDs = 4x2pcs)  
Scale=free

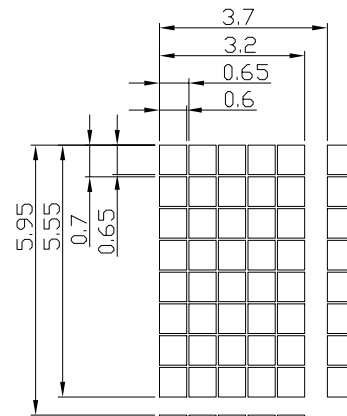

Pixel Details  
Scale=6/1

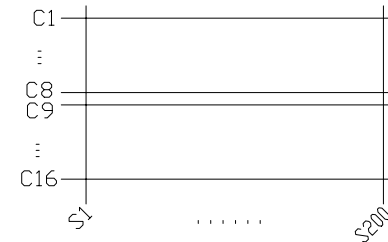

Panel Wiring Details  
Scale=free

- Note:
- \*1. All Dimension Are In mm Whit  $\pm 0.5$  Tolerance Unless  $\square$ therwise Specified
  - \*2. LCD Display Type : DFSTN, Negative, Transmissive
  - \*3. Viewing Direction : 6H
  - \*4. Duty : 1/16; Bias : 1/5
  - \*5. VLCD Voltage : 4.5V
  - \*6. Operating Voltage : 5.0V
  - \*7. Backlight Color : Green
  - \*8. Operating Temperature : 0°C~50°C
  - \*9. Storage Temperature : -20°C~60°C
  - \*10. Environmental Safe Standard : RoHS

<b>HOT DISPLAY</b>			
Dwg Title <b>HTM4002CNDDN6MLGR Outline</b>			
Dwg No. 060215		Date 2008-03-05	
Scale 1/1	Unit mm	Tol. $\pm 0.5$	
Drawn JACK	Checked	Approved	