



\*\*\*为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。  
 \*\*\*In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.  
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

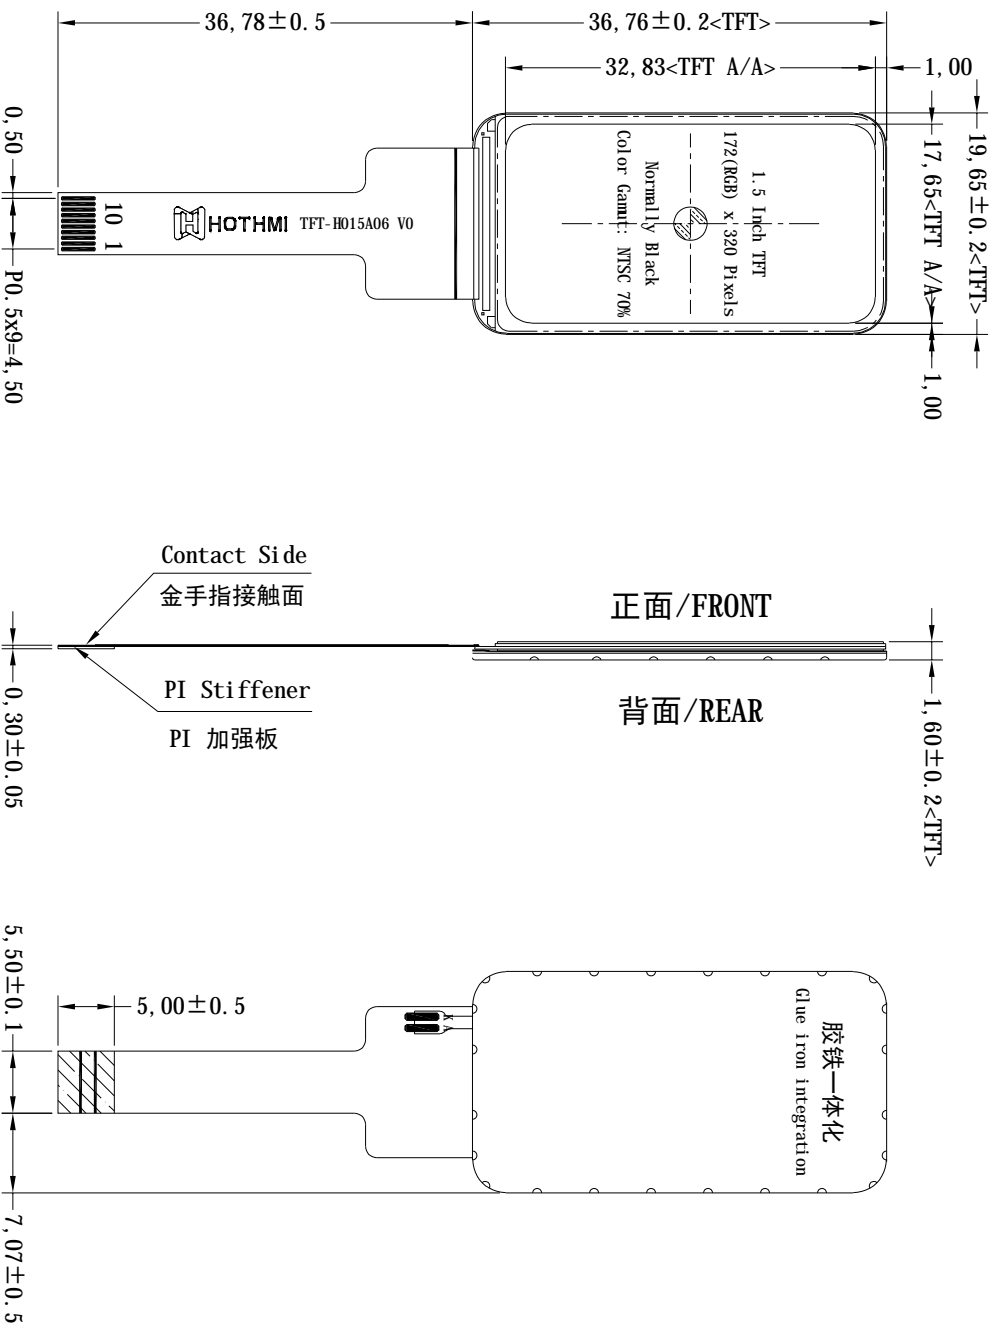

字体：黑体  
**bold (typeface)**

TFT Pin SIGNAL

1	LEDA	
2	VCI	
3	CS	
4	RESX	
5	SCL	
6	SDA	
7	D/CX	
8	TE	
9	LEDK	
10	GND	

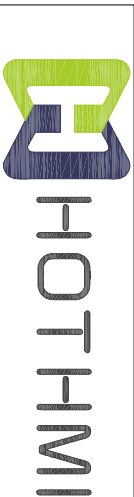

产品型号  
 Product model **TFT-H015A06QVIST3N10**

比例  
 Scale 1:1  
 设计制图  
 Design Liu.YL  
 日期  
 Date 2024-09-07

版本  
 Ver V0-0  
 单位  
 Unit MM  
 公差  
 Tol. ± 0.3

观看方向/角度 Viewing Direction	U85/D85/885/L85	TFT 储存温度 TFT Storage Temp	-20 °C ~ +70 °C
接口 Interface	4-line 8bit serial I/F	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
工作电压 Operating Voltage	VCI=3.0 ~ 3.3V (Type)	背光驱动条件 Backlight conditions	Vf= 3.0 ~ 3.4V, If= 60 mA
驱动芯片 Driver IC	ST7778<TFT>或兼容芯片	液晶模组亮度 LCM Brightness	300 cd/m <sup>2</sup> (Typ)/固定电流测试