



***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

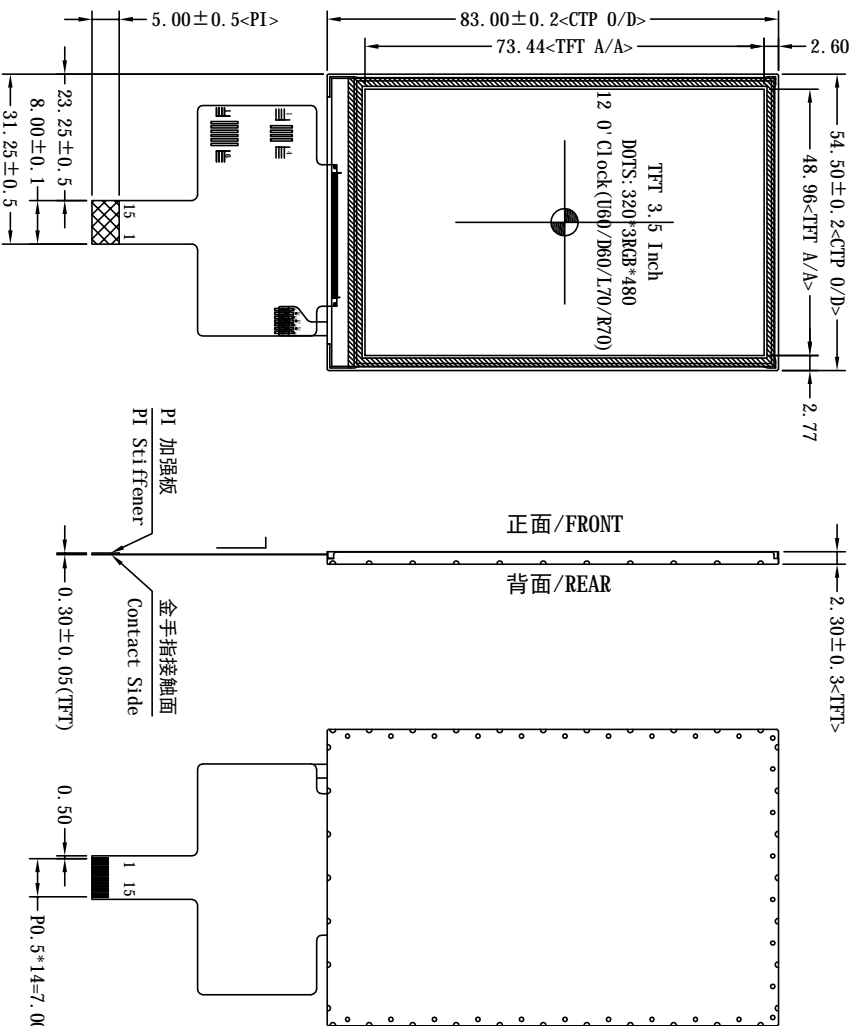


SPI	Interface Mode
SPI=GND	3-Line Serial
SPI=VCI	4-Line Serial

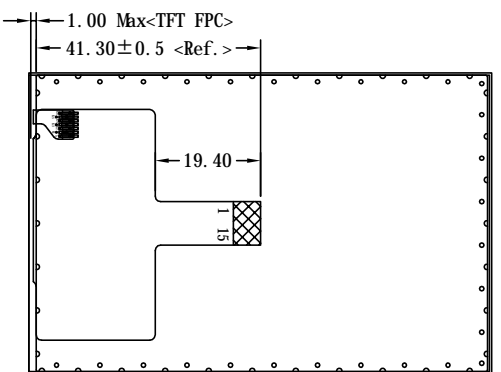


Pin_SIGNAL	Pin_SIGNAL
1	LEDK
2	LEDA
3	GND
4	SPI
5	RESX
6	SPI - SDA
7	SPI - SCL
8	SPI - D/CX
9	SPI - CSX
10	VCI
11	NC
12	NC
13	NC
14	NC
15	NC

液晶显示类型	薄膜晶体管/透射式/常白/262K 色
LCD Display Type	TFT/Transmissive/Normal Ly White/262K COLOR
观看方向/角度	12.0 Clock (U6b/D6b/L70/R70)
Viewing Direction	
接口	3-Line or 4-Line Serial
Interface	
工作电压	VCI=3.3V, CTP-VDD=3.3V (Type)
Operating Voltage	
TFT 工作温度	-20 °C ~ 70 °C
TFT Operating Temp	



Vf=3.0 ~ 3.4V, If=120mA
 Constant Current Test

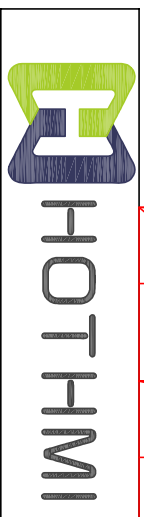

产品型号
TFT-H035A11HVST5N15

比例	1:1	设计制图	Li u. YL	日期	2022-11-21
Scale		Design		Date	
版本	V0-3	单位	MM	公差	±0.3
Ver		Unit		Tol.	