


\*\*\*为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于2分钟或者更短的时间内刷新显示内容一次或多次。  
 \*\*\*In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.  
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

字体：黑体  
**bold (typeface)**

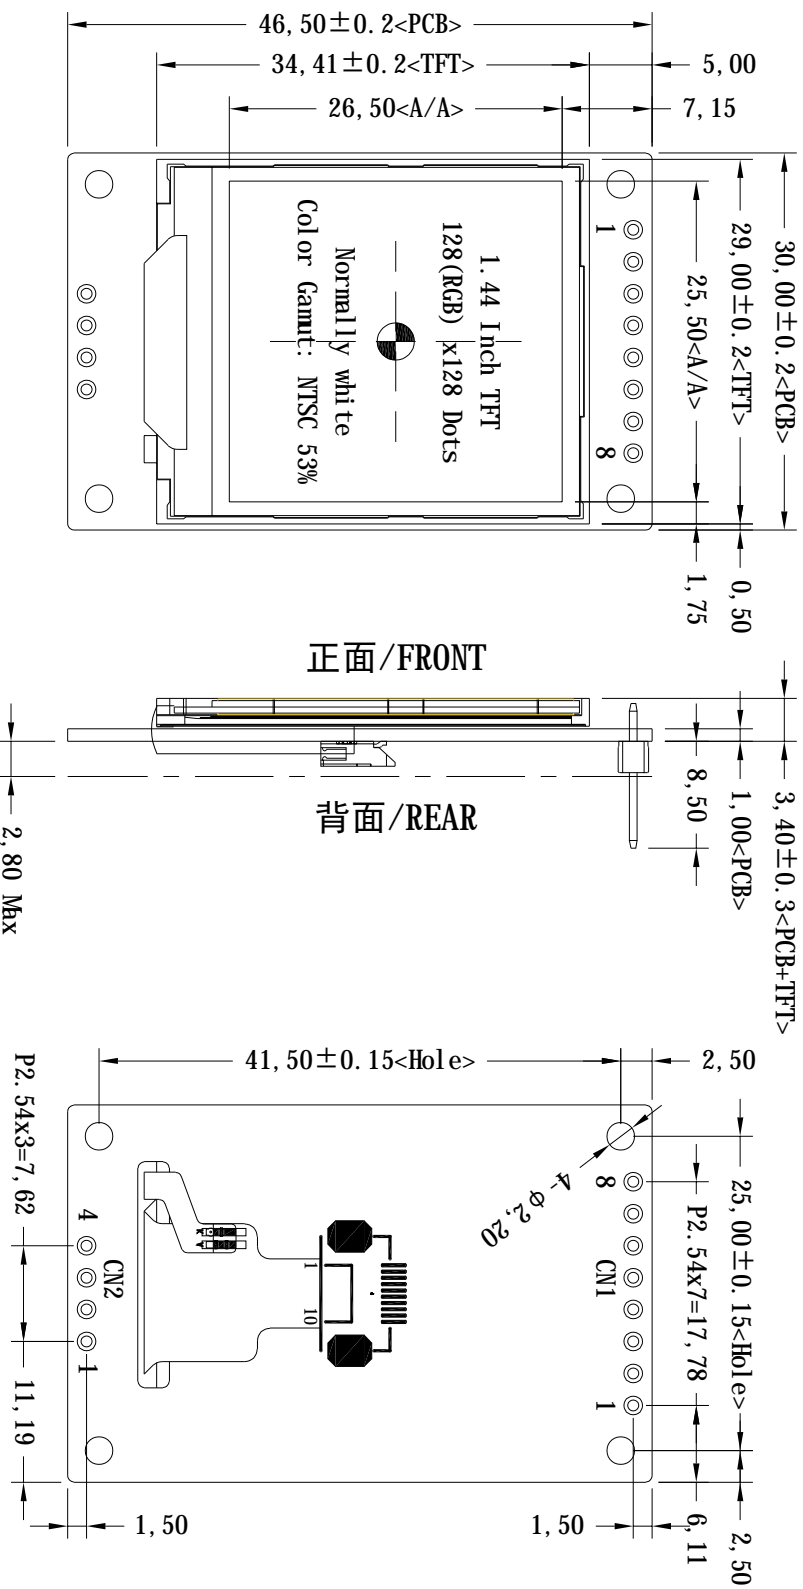

CN1_SIGNAL	CN2_SIGNAL
1 GND	1 TE
2 VCI	2 GND
3 SCLK	3 GND
4 SDA	4 GND
5 RESX	
6 D/CX	
7 CS	
8 BLEND	

观看方向/角度 Viewing Direction	U70/D60/L70/R70	TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C	产品型号 Product model	HTM-H014A05-SPI-A01		
接口 Interface	SPI-4L	驱动芯片 Driver IC	ST7735	比例 Scale	1:1	设计制图 Design	Li u. YL
工作电压 Operating Voltage	VCI=3.0 ~ 3.3V	背光 Backlight	白色	版本 Ver	V0-0	单位 Unit	MM
TFT 工作温度 TFT Operating Temp	-20 °C ~ 70 °C	液晶模组亮度 LCM Brightness	300 cd/m <sup>2</sup> (Typ)	日期 Date	2023-11-30	公差 Tol.	±0.3

