




正视图
Front view

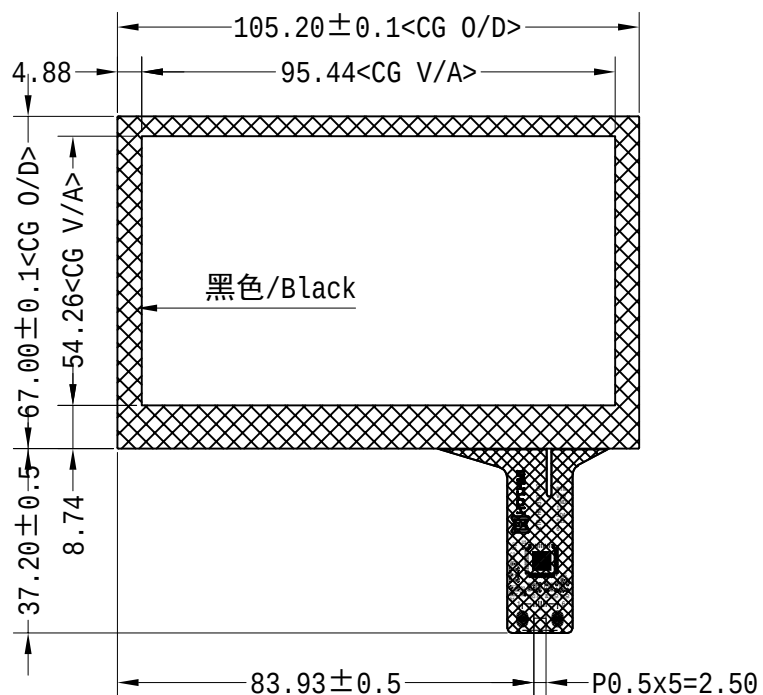

侧视图
Side view

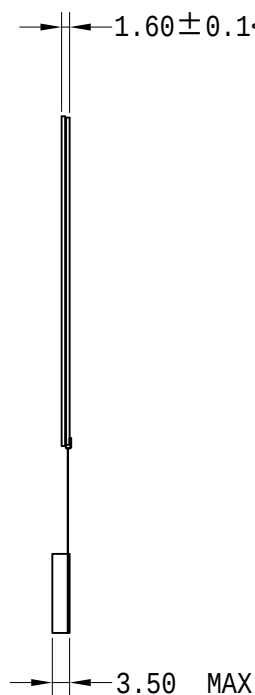

背视图
Back view

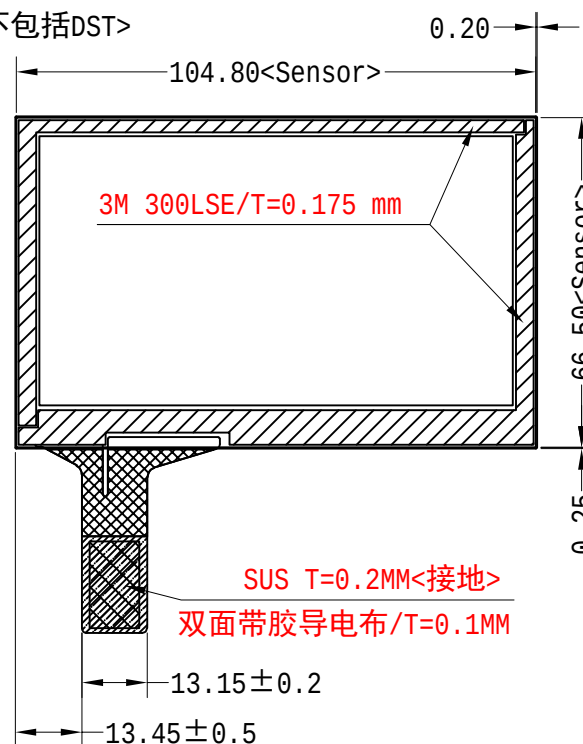

触摸构成 Touch constitute	Glass+Glass/总厚度: $1.6 \pm 0.1\text{mm}$ (不含背胶)		
联接方式 Connection method	FFC/6P/0.5MM间距	表面硬度 Surface hardness	6H
接口 Interface	IIC	驱动芯片 Driver IC	GT911
工作电压 Operating Voltage	$VDD=3.3V \pm 0.3V$	CTP 工作环境 CTP working environment	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$, $\leq 90\%\text{RH}$
透光率 Transmittance	$\geq 85\%$	CTP 储存环境 CTP Storage environment	$-30^{\circ}\text{C} \sim 80^{\circ}\text{C}$, $\leq 90\%\text{RH}$

6Pin_SIGNAL	
1	VDD
2	INT
3	GND
4	SDA
5	SCL
6	RTN



产品型号 Product model	CTP-H04399		
比例 Scale	1:1	设计制图 Design	Liu.YL
版本 Ver	V0-0	单位 Unit	MM
公差 Tol.	± 0.2	日期 Date	2025-06-13

